



**NON-METALLIC  
CONDUIT**  
**TYPE NM,  
NMHT & NM2**



## TYPE NM

Trade Size	Type	Inside Bend Radius	Wt. (Lbs.)/ 100 Ft.	Coil Footage*	
				Length	Part #
3/8"	NM-10	2.0"	10	100	81001
1/2"	NM-11	3.25"	11	100	81011
3/4"	NM-12	4.25"	15	100	81022
1"	NM-13	6.5"	25	100	81032
1-1/4"	NM-14	8.0"	34	100	81042
1-1/2"	NM-15	9.0"	42	50	81052
2"	NM-16	11.0"	60	50	81062

- UL Listed & CSA Certified
- General purpose non-metallic liquid-tight conduit
- Provides excellent protection to wiring from abrasion, sunlight, mild acids, alkaline and oils
- Standard colors gray and black


NM, NMHT & NM2  
WORK WITH  
NMLT & NMSC  
FITTINGS (**FLIP**) →



## TYPE NMHT

Trade Size	Type	Inside Bend Radius	Wt. (Lbs.)/ 100 Ft.	Coil Footage*	
				Length	Part #
3/8"	NMHT-10	2.0"	10	100	82101
1/2"	NMHT-11	3.25"	11	100	82111
3/4"	NMHT-12	4.25"	15	100	82122
1"	NMHT-13	6.5"	25	100	82132
1-1/4"	NMHT-14	8.0"	34	100	82143
1-1/2"	NMHT-15	9.0"	42	50	82152
2"	NMHT-16	11.0"	60	50	82162


- UL Listed & CSA Certified
- Similar to NM but able to withstand high temperature environments
- -20°C to 105°C Dry/60°C Wet/70°C Oil

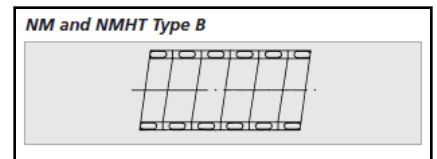

## TYPE NM2

Trade Size	Type	Inside Bend Radius	Wt. (Lbs.)/ 100 Ft.	Coil Footage	
				Length	Part #
1/4"	NM2-140	0.6"	5	100	82000
3/8"	NM2-10	0.7"	6	100	82001
1/2"	NM2-11	0.9"	8	100	82011
3/4"	NM2-12	1.1"	10	100	82022
1"	NM2-13	1.3"	15	100	82032
1-1/4"	NM2-14	1.7"	20	50	82042
1-1/2"	NM2-15	1.9"	26	50	82052
2"	NM2-16	2.4"	36	50	82062

- UL Recognized
- Extra-flexible liquid-tight non-metallic tubing
- Easily cuts and installs in tight quarters and small bends
- OEM Applications

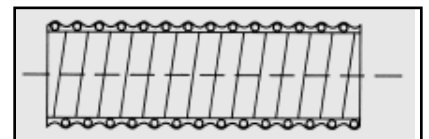



## NON-METALLIC FITTINGS




Trade Size	Catalog Part #	Config.	KO Size
3/8"	NMLT-10	Straight	1/2"
1/2"	NMLT-11	Straight	1/2"
3/4"	NMLT-12	Straight	3/4"
1"	NMLT-13	Straight	1"
1-1/4"	NMLT-14	Straight	1-1/4"
1-1/2"	NMLT-15	Straight	1-1/2"
2"	NMLT-16	Straight	2"
3/8"	NMLT-20	90°	1/2"
1/2"	NMLT-21	90°	1/2"
3/4"	NMLT-22	90°	3/4"
1"	NMLT-23	90°	1"
1-1/4"	NMLT-24	90°	1-1/4"
1-1/2"	NMLT-25	90°	1-1/2"
2"	NMLT-26	90°	2"
1/2"	NMSC-11	Straight	1/2"
3/4"	NMSC-12	Straight	3/4"
1/2"	NMSC-21	90°	1/2"
3/4"	NMSC-22	90°	3/4"

### TYPE NMLT (BLACK & GRAY) AND TYPE NMSC GRAY

- Complete Product Offering from 3/8" – 2"
- UL Listed
- Liquid-Tight; IP-65 rated (NEMA 4)
- Gray & Black Available
- Two piece & one piece available
- Competitively Priced
- Inventory – will ship in 24 hours
- UL listed splice fitting available 3/8" – 1"
- Fittings count toward flex and/or liquid-tight prepaid order amount
- Other colors available upon request
- NMLT & NMSC work with Types NM, NMHT and NM2 non-metallic conduit (flip →)

#### CONSTRUCTION:

- UL and CUL Listed
- "O" Ring and steel locknut included
- Angled connectors provide smooth "sweep" radius
- Standard NPT Threads
- Suitable for indoor/outdoor use
- NMLT made from Nylon 6. Flame rating 94V-2. 125° C
- NMLT-30 Series available in 45° angle configuration
- NMSC screw-on, one-piece connectors made from UV rated PVC

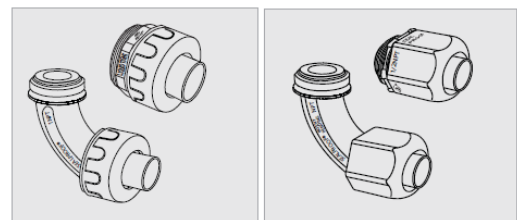

NMLT

NMSC